


# RCCN 日成LDPE波纹管 Polyethylene Corrugated Tubing

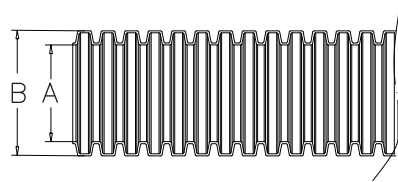


单位/Unit:mm

材质:LDPE 聚乙烯 (Polyethylene)  
 温度:-30 -100 ,短时110  
 结构:内部和外表均为波浪型。  
 颜色:黑色RAL9005,深灰色RAL7037  
 其它颜色可选购有起订量要求  
 产品认证: 欧洲CE, 欧洲环保ROHS, REACH.  
 特性:表面好的光泽;柔软;  
 用途:可保护电线电缆不受外力磨损及绝缘承载能力:不容易变形,但可以迅速恢复,并且本身无任何损伤。  
 应用场合:机器机柜、机床制造、电力设备、自动化装置、食品、包装等机械;  
 使用方法:将电线电缆穿入管内,再配合日成系列软管接头使用即可。  
 备注:带\*号为常规备货型号。特殊包装长度有起订量要求,测试温度以日成高低温机测试合格为准,使用需根据现场环境为准。

Material:LDPE (Polyethylene)  
 Work Temperature:-30 to100 ,110 in short time  
 Color:black/ral9005,gray/ral7037  
 Certificates: CE,ROHS,REACH.  
 Characheristics:good luster of exterior, stronger machinism loading, perfect flexible  
 Functions:insulated,protect cables and wires Loading ability:uneasy to change shape,reshape speedly without hurt body  
 Where to use:Equipment,machines, electricity sets, and so on  
 How to use:insert cables or wires to RCCN flexible conduit  
 Remarks:the items with \* are available in stock.special packing length come with MOQ work temperature tested according to RCCN factory test machines

型号 Item No.		规格	内径 I.D.	外径 O.D.	静态弯曲半径 Stat.r	动态弯曲半径 Dyn.r	包装 Packing
黑色 Black Ral9005	深灰色 Gray Ral7037	Sizes	A	B			M
BG-07B/LDPE	BG-07G//LDPE	1/4"	6.5	10.0	15	35	100M
BG-10B/LDPE	BG-10G/LDPE	5/16"	10.0	13.0	20	45	100M
BG-12B/LDPE	BG-12G/LDPE	-	12.0	15.8	25	55	100M
BG-15B/LDPE	BG-15G/LDPE	3/8"	14.3	18.5	35	65	100M
BG-17B/LDPE	BG-17G/LDPE	1/2"	17.0	21.2	40	75	100M
BG-23B/LDPE	BG-23G/LDPE	3/4"	23.0	28.5	45	100	50M
BG-29B/LDPE	BG-29G/LDPE	1"	29.0	34.5	55	120	50M
BG-36B/LDPE	BG-36G/LDPE	1 1/4"	36.0	42.5	65	150	50M
BG-48B/LDPE	BG-48G/LDPE	2"	48.0	54.5	80	190	25M
BG-08B/LDPE	BG-08G/LDPE	9/32"	8.0	11.5	13	25	100M
BG-11B/LDPE	BG-11G/LDPE	-	11.0	14.0	20	45	100M
BG-16B/LDPE	BG-16G/LDPE	-	14.5	20.0	25	55	100M
BG-20B/LDPE	BG-20G/LDPE	-	20.0	25.0	50	85	50M
BG-25B/LDPE	BG-25G/LDPE	-	25.5	31.5	50	110	50M

# RCCN 日成LDPEV0阻燃波纹管 Polyethylene Corrugated Tubing

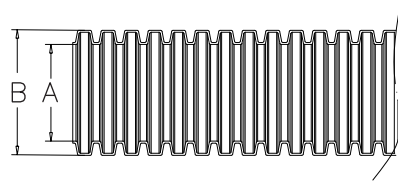

单位/Unit:mm

材质:LDPE 聚乙烯 (Polyethylene)  
 温度:-30 -100 ,短时110  
 结构:内部和外表均为波浪型。  
 颜色:黑色RAL9005,深灰色RAL7037  
 产品认证: 欧洲CE,ROHS.  
 防火等级:94-V0。  
 特性:表面好的光泽;柔软;  
 用途:可保护电线电缆不受外力磨损及绝缘  
 承载能力:不容易变形,但可以迅速恢复,并且本身无任何损伤。  
 应用场合:机器机柜、机床制造、电力设备、自动化装置、食品、包装等机械;  
 使用方法:将电线电缆穿入管内,再配合日成系列软管接头使用即可。  
 备注:特殊包装长度有起订量要求,测试温度以日成高低温机测试合格为准,使用需根据现场环境为准。另备环保型阻燃管,有起订量要求。

Material:LDPE (Polyethylene)  
 Work Temperature:-30 to100 ,110 in short time  
 Color:Color:black/ral9005,gray/ral7037  
 Certificates: CE,ROHS  
 Inflaming retarding rate:V-0  
 Characheristics:good luster of exterior, stronger machinism loading, perfect flexible  
 Functions:insulated,protect cables and wires  
 Loading ability:uneasy to change shape,reshape speedly without hurt body  
 Where to use:Equipment,machines, electricity sets, and so on.  
 How to use:insert cables or wires to RCCN flexible conduit  
 Remarks:the items with \* are available in stock. special packing length come with MOQ work temperature tested according to RCCN factory test machines

型号 Item No.		规格	内径 I.D.	外径 O.D.	静态弯曲半径 Stat.r	动态弯曲半径 Dyn.r	包装 Packing
黑色 Black Ral9005	深灰色 Gray Ral7037	Sizes	A	B			M
BG-07BV0/LDPE	BG-07GV0/LDPE	1/4"	6.5	10.0	15	35	100M
BG-10BV0/LDPE	BG-10GV0/LDPE	5/16"	10.0	13.0	20	45	100M
BG-12BV0/LDPE	BG-12GV0/LDPE	-	12.0	15.8	25	55	100M
BG-15BV0/LDPE	BG-15GV0/LDPE	3/8"	14.3	18.5	35	65	100M
BG-17BV0/LDPE	BG-17GV0/LDPE	1/2"	17.0	21.2	40	75	100M
BG-23BV0/LDPE	BG-23GV0/LDPE	3/4"	23.0	28.5	45	100	50M
BG-29BV0/LDPE	BG-29GV0/LDPE	1"	29.0	34.5	55	120	50M
BG-36BV0/LDPE	BG-36GV0/LDPE	1 1/4"	36.0	42.5	65	150	50M
BG-48BV0/LDPE	BG-48GV0/LDPE	2"	48.0	54.5	80	190	25M
BG-08BV0/LDPE	BG-08GV0/LDPE	9/32"	8.0	11.5	13	25	100M
BG-11BV0/LDPE	BG-11GV0/LDPE	-	11.0	14.0	20	45	100M
BG-16BV0/LDPE	BG-16GV0/LDPE	-	14.5	20.0	25	55	100M
BG-20BV0/LDPE	BG-20GV0/LDPE	-	20.0	25.0	50	85	50M
BG-25BV0/LDPE	BG-25GV0/LDPE	-	25.5	31.5	50	110	50M